


# 低阻抗品

## Low E.S.R.

項目 Item	特性 Characteristics																		
使用溫度範圍 Operating Temperature Range	- 40 ~ 105°C																		
額定電壓範圍 Rated Working Voltage Range	10V ~ 50V DC																		
靜電容量容許差 Capacitance Tolerance (120Hz, 25°C )	±20% (M)																		
洩漏電流 Leakage Current (25°C )	$I \leq 0.01CV + 3 (\mu A)$ I : Leakage Current ( $\mu A$ ) C : Rated Capacitance ( $\mu F$ ) V : Working Voltage (V) After 5 minutes applying the DC working Voltage																		
突波電壓 Surge Voltage (25°C )	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>W.V.</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>S.V.</td> <td>13</td> <td>20</td> <td>32</td> <td>44</td> <td>63</td> </tr> </table>	W.V.	10	16	25	35	50	S.V.	13	20	32	44	63						
W.V.	10	16	25	35	50														
S.V.	13	20	32	44	63														
散逸因素 (Tan. $\theta$ ) Dissipation Factor (120Hz, 25°C )	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>W.V.</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tan. <math>\theta</math></td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> </tr> </table>	W.V.	10	16	25	35	50	Tan. $\theta$	0.14	0.12	0.10	0.10	0.08						
W.V.	10	16	25	35	50														
Tan. $\theta$	0.14	0.12	0.10	0.10	0.08														
溫度特性 Temperature Characteristics	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>W.V.</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>-25°C /+25°C</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>-40°C /+25</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table> <p>Impedance ratio at 120HZ</p>	W.V.	10	16	25	35	50	-25°C /+25°C	3	2	2	2	2	-40°C /+25	6	4	4	3	3
W.V.	10	16	25	35	50														
-25°C /+25°C	3	2	2	2	2														
-40°C /+25	6	4	4	3	3														
高溫負荷特性 Load Test	<p>After 2000 hours application of W.V. at +105°C the capacitor shall meet he following limits</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Capacitance change</td> <td><math>\leq \pm 20\%</math> of initial value</td> </tr> <tr> <td>Tan. <math>\theta</math></td> <td><math>\leq \pm 200\%</math> of initial specified value</td> </tr> <tr> <td>Leakage current</td> <td><math>\leq</math> initial specified value</td> </tr> </table>	Capacitance change	$\leq \pm 20\%$ of initial value	Tan. $\theta$	$\leq \pm 200\%$ of initial specified value	Leakage current	$\leq$ initial specified value												
Capacitance change	$\leq \pm 20\%$ of initial value																		
Tan. $\theta$	$\leq \pm 200\%$ of initial specified value																		
Leakage current	$\leq$ initial specified value																		
放置特性 Shelf Test	<p>After 500 hours application of W.V. at +105°C the capacitor shall meet he following limits</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Capacitance change</td> <td><math>\leq \pm 20\%</math> of initial value</td> </tr> <tr> <td>Tan. <math>\theta</math></td> <td><math>\leq 200\%</math> of initial specified value</td> </tr> <tr> <td>Leakage current</td> <td><math>\leq 200\%</math> of initial specified value</td> </tr> </table>	Capacitance change	$\leq \pm 20\%$ of initial value	Tan. $\theta$	$\leq 200\%$ of initial specified value	Leakage current	$\leq 200\%$ of initial specified value												
Capacitance change	$\leq \pm 20\%$ of initial value																		
Tan. $\theta$	$\leq 200\%$ of initial specified value																		
Leakage current	$\leq 200\%$ of initial specified value																		

# 尺 寸 圖

## Dimension

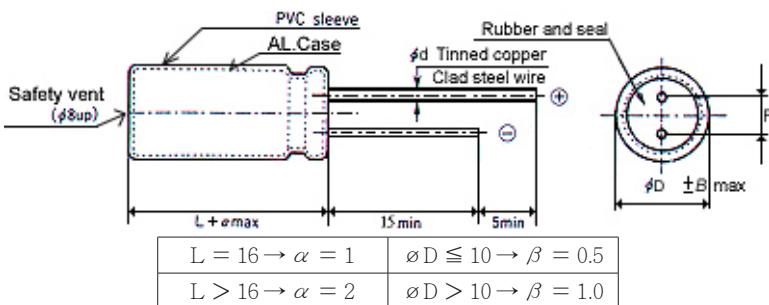

Unit (mm)

D	5	6	8	10	13	16
$F \pm 0.5$	2	2.5	3.5	5	5	7.5
$d \pm 0.02$	0.5	0.5	0.5	0.6	0.6	0.8

D x L (m/m)

$\mu F$	WV	6.3	10	16	25	35	50
10							5*11
22							6*12
33						6*12	6*12
47				5*11	6*12	6*12	6*12
100			5*11	6*12	6*12	8*12	8*12
220			6*12	6*12	8*12	8*12	10*17
330			8*12	8*12	8*14	10*17	10*21
470			8*12	8*12	8*14	10*15	13*21
1000		8*12	8*14	10*17	10*17	13*21	16*26
2200		10*21	10*20	13*21	13*26	16*36	18*36
3300		10*21	10*26	13*26	16*32	16*36	
4700		10*25	13*25	16*32	18*36	22*36	

$\mu F$	WV ITEM	6.3	10	16	25	35	50
	PERMISSIBLE RUFFLE CURRENT (mA)	IMPEDANCE 20°C 100kHz Max(Ω)	PERMISSIBLE RUFFLE CURRENT (mA)	IMPEDANCE 20°C 100kHz Max(Ω)	PERMISSIBLE RUFFLE CURRENT (mA)	IMPEDANCE 20°C 100kHz Max(Ω)	PERMISSIBLE RUFFLE CURRENT (mA)
10							
22							
33						230	0.40
47				200	0.40	240	0.35
100		242	1.10	360	0.30	410	0.20
220		390	0.45	575	0.40	750	0.075
330		540	0.38	740	0.08	850	0.060
470		750	0.25	990	0.06	1260	0.045
1000	1000	0.15	1220	0.13	1840	0.035	2340
2200	2160	0.065	2370	0.05	2750	0.022	3400
3300	2290	0.055	2720	0.045	3490	0.018	2800
4700	3200	0.04	3450	0.04	2700	0.019	3200